

CABLED MOSS STITCH COWL

This chunky, cozy cowl takes advantage of doubled yarn for a quick knit and plump cables. First time crossing cables? Have no fear—you'll be surprised how easy it is to master!


Finished Size:	Approx. $9\frac{1}{2}$ "/24cm tall (with edges rolled) x 28"/71cm around.
Yarn:	2 skeins Manos del Uruguay Maxima (219 yds/200m each).
Needles & Notions:	US 10½ (6.5mm) 24"/60cm circular needles, or size to obtain gauge; 10 st markers (1 in a different color); large cable needle; darning needle to finish.
Gauge:	14 sts/22 rounds = approx. 4"/10cm in pattern stitch, with yarn held double.
Glossary:	CN = cable needle; K = knit; P = purl; PFB = purl into front then back of same st; PM = place marker; RM = remove marker; S1 = slip purlwise; SM = slip marker; St(s) = stitch(es).
Cast on:	With yarn held double, using cable cast-on method, cast on 90 sts
First welted edge:	PM of different color and join in round being careful not to twist. Purl 2 rounds. <u>Increase round</u> : (P8, PFB, PM) 10 times [100 sts].
Cable pattern:	 <u>Round 1</u>: *(K1, P1) 5 times, SM; P1, K3, P2, K3, P1, SM*; repeat between * * 4 more times. <u>Round 2</u>: Repeat Round 1. <u>Round 3</u>: *(P1, K1) 5 times, SM; P1, K3, P2, K3, P1, SM*; repeat between * * 4 more times. <u>Round 4</u>: Repeat Round 3. <u>Rounds 5 & 6</u>: Repeat Round 1. <u>Round 7 (cable twist)</u>: *(P1, K1) 5 times, SM; Sl next 3 sts to CN and hold in front, K3, P2 (when working the 5 sts that will be hidden behind cable, some sts will change from K to P and vice versa; this won't show), K3 from CN, P1, SM*; repeat between * * 4 more times. <u>Round 8</u>: Repeat Round 3. <u>Rounds 9 & 10</u>: Repeat Round 1. <u>Rounds 11 & 12</u>: Repeat Round 3. Repeat <u>Rounds 1–12</u> twice more. Repeat <u>Rounds 1–11</u> once more. [47 pattern rows].
Final welted edge:	Round 1: *P10, RM, P2tog, P2, P2tog, P4, RM*; repeat between * * 4 more times. [90 sts]

Continued on reverse...

<u>Rounds 2 & 3</u>: Purl.

Bind off: Bind off all sts purlwise, firmly.

Finishing:Weave in ends on wrong side. Wet block to specified dimensions, pulling cast-on (shoulder)
edge a little wider and nudging bind-off (neck) edge a little narrower; dry thoroughly.

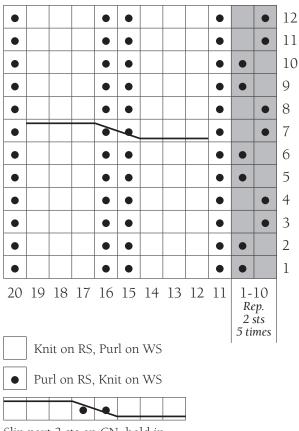

Slip next 3 sts on CN, hold in front, K3, P2, K3 from CN.